



# CorePro LEDbulb

## CorePro LEDbulb ND 19-150WA67E27 827FR


LEDbulbs are compatible with existing fixtures with an E27 holder and are designed for retrofit replacement of incandescent bulbs.

### Product data

General Information		Power factor (nom.)	
Cap base	E27 [ E27]		0.52
Nominal lifetime (nom.)	15000 h	Voltage (Nom)	220-240 V
Switching cycle	50000X	<b>Temperature</b>	
Technical type	19-150W	T-Case maximum (nom.)	90 °C
<b>Light Technical</b>		<b>Controls and Dimming</b>	
Colour code	827 [ CCT of 2,700 K]	Dimmable	No
Beam Angle (Nom)	150 °	<b>Mechanical and Housing</b>	
Luminous flux (nom.)	2500 lm	Bulb finish	Frosted
Luminous flux (rated) (nom.)	2500 lm	<b>Approval and Application</b>	
Colour designation	Warm white (WW)	Energy efficiency label (EEL)	A++
Correlated colour temperature (nom.)	2700 K	Energy Consumption kWh/1000 h	19 kWh
Luminous efficacy (rated) (nom.)	131.00 lm/W	<b>Product Data</b>	
Colour consistency	<6	Full product code	871869966220200
Color rendering index (nom.)	80	Order product name	CorePro LEDbulb ND 19-150WA67E27 827FR
LLMF at end of nominal lifetime (nom.)	70 %	EAN/UPC – product	8718699662202
<b>Operating and Electrical</b>		Order code	66220200
Input frequency	50 to 60 Hz	Numerator – quantity per pack	1
Power (Rated) (Nom)	19 W	Numerator – packs per outer box	6
Lamp current (nom.)	175 mA	Material no. (12NC)	929002048102
Wattage equivalent	150 W	Net weight (piece)	0.174 kg
Starting time (nom.)	0.5 s		
Warm-up time to 60% light (nom.)	0.5 s		

# CorePro LEDbulb


## Dimensional drawing




Bulb A67 220-240V 18-150W2500lm2700KE27

Product	D	C
CorePro LEDbulb ND 19-150WA67E27 827FR	77 mm	142 mm


## Photometric data



LEDbulb 17 5-150W A67 E27

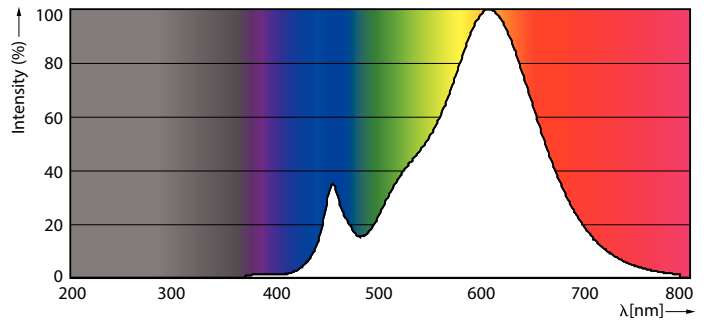

CorePro LEDbulb ND 19-150WA67E27 827FR




General Uniform Lightness 11 Page 11 of 11

CorePro LEDbulb ND 19-150WA67E27 827FR

# CorePro LEDbulb

## Lifetime

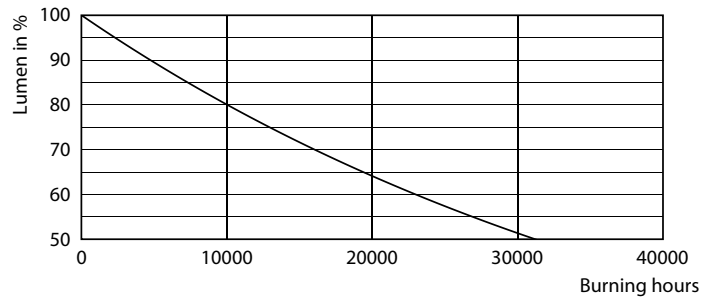

LEDbulb ND E27 FR

LEDbulb ND E27 FR

