


## Dimensions

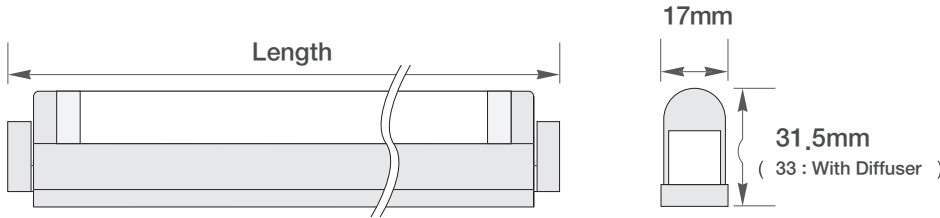


Model No.	Lamp power (watt)	Length (mm)	lm	Input Current (mA)
DL7A4B23NC/T	7W	262	420	58
DL10A4B23NC/T	10W	339	700	83
DL18A4B23NC/T	18W	517	1305	150

## Specification


Frequency range	50/60Hz
Voltage	220-240V
Power factor	>97%
Color rendering	>82
Degree of protection	IP20
Lamp life	10,000 hr
Diameter	13mm (T4)
Class of protection	II



## Mounting

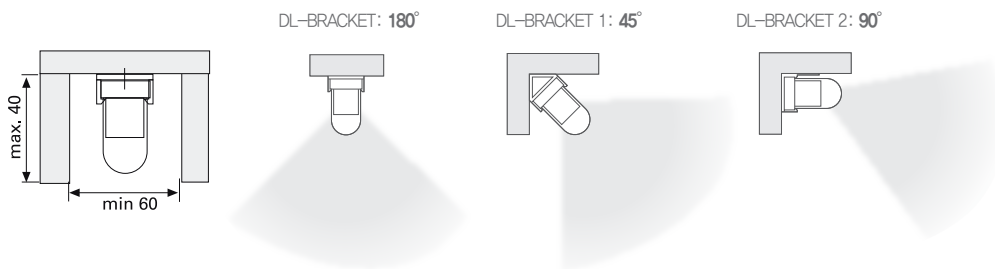

## Connection (Total lamp output in one strip light maximum 270W)

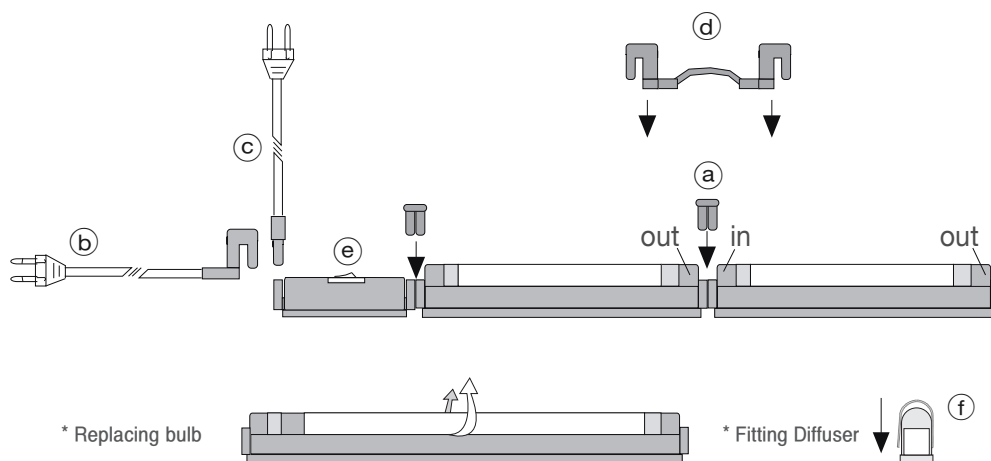

\* Replacing bulb

\* Fitting Diffuser

## Accessories



- (a) DLCP/L/T  
direct connecting cap



- (b) DLPC230/T  
powercord 1800mm (6 feet) with plug



- (c) DLPC230/SM2/T  
powercord 1800mm (6 feet) with plug & straight connector



- (d) DLPTC/T  
connecting cable 150mm (6 inch)  
DLPTC1/T  
connecting cable 300mm (1 feet)  
DLPTC2/T  
connecting cable 600mm (2 feet)  
DLPTC4/T  
connecting cable 1200mm (4 feet)  
DLPTC6/T  
connecting cable 1800mm (6 feet)



- (e) DLSB/T  
on-off switch



- (f) DL7CV  
polycarbonate diffuser for 7W Decolamp  
DL10CV  
polycarbonate diffuser for 10W Decolamp  
DL18CV  
polycarbonate diffuser for 18W Decolamp