PROMOTECH







PRO 5 PB is a handy, portable pipe beveling machine suitable for milling edges of pipes made of carbon and stainless steels, aluminum alloys and copper-nickels.

It can be used efficiently by a single operator. Self-centering expandable mandrels provide quick and proper alignment to a pipe or a tube prior to machining operations.

Depending on the tool bits in use PRO 5 PB can perform external beveling, J-beveling, internal calibration and facing pipes from inside diameters of 32 mm (1.26") to outside diameters of 114 mm (4.49") or up to 140mm (5.51") as option. All these weld prep operations are made fast and easy. Up to three tool bits can be mounted and work, simultaneously.

According to users preferences and depending on site conditions PRO 5 PB machine can be operated with a high quality powerful pneumatic motor or top quality high torque electric motor.

Optional small spindle disc and ratchet wrench enable pipe machining in difficult to access and space restricted areas.













ID 32-107mm (1.26 - 4.21") 107-133mm (4.21 - 5.24") /option/



Facing off



Pipe OD beveling 114mm (4.49") up to 140mm (5.51") /option/



J-groove beveling

Technical specifications		PRO 5 PB with electric motor	PRO 5 PB with pneumatic motor
Electric motor		1.100 W	-
Supply		110-120V/50-60Hz or 220-240V/50-60Hz	-
Rotational speed (nominal)		gear 1 – 0 to 90 rpm	-
		gear 2 – 0 to 300 rpm	-
Pneumatic drive		-	800 W
Air requirement		-	0,6 MPa (87 PSI)
Air consumption		-	1600 l/min (49.4 CFM)
Rotational speed (nominal)		-	90 rpm
Pipe diameter		32 mm ID to 114 mm OD (1.26-4.49")	32 mm ID to 114 mm OD (1.26-4.49")
Maximum pipe wall thickness for outside diameter	up to 114 mm	12 mm (0.47")	12 mm (0.47")
	114–124 mm*	10 mm (0.39")	10 mm (0.39")
	124–132 mm*	8 mm (0.31")	8 mm (0.31'')
	132–140 mm*	6 mm (0.24")	6 mm (0.24")
Weight (incl. motor)		11 kg (24 lbs)	10 kg (22 lbs)


^{*} Available with the optional 140 mm spindle disk set.

Standard shipping set:

- PRO 5 PB (without motor, tool bits)
- Metal box
- Standard self-centering expandable mandrel for pipe ID Ø 32 – 107mm (1.26 – 4.21")
- 118mm spindle disc
- Jaw blocks (1,2,3,4,5,6) 3 sets
- · Set of tools
- · Coolant container
- Operator's manual

Product Code: UKS-0472-10-00-00-0



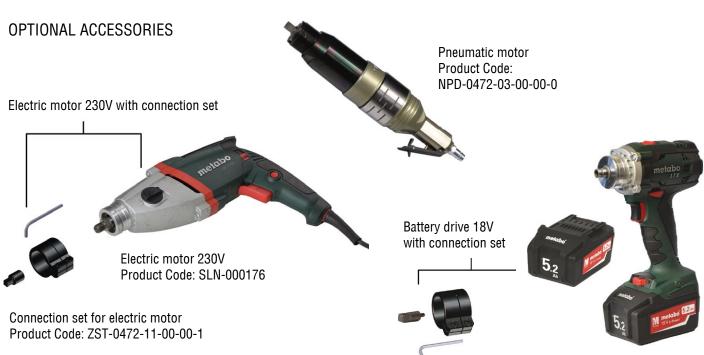

Connection set for battery drive Product Code: ZST-0472-22-00-00-0

Battery drive for PRO-5 beveller incl. 2 batteries 18 V, 5.2 Ah Product Code: WRT-000021

OPTIONAL ACCESSORIES



Small mandrel

ID 25 – 32 mm (1" – 1 L") Product Code: TRZ-0472-21-00-00-0





Battery charger 18 V


Product Code for Europe: LDW-000008 Product Code for USA: LDW-000009 Product Code for UK: LDW-0000010 Product Code for Australia: LDW-0000011

Battery 18 V, 5.2 Ah


Product Code: AKM-000087





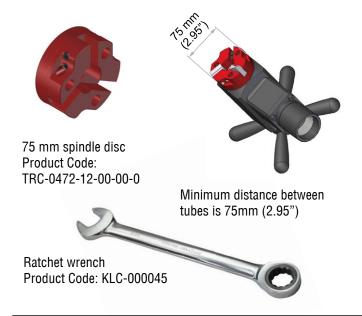







Extension set for OD Ø up to 140mm (5.51") including 140 mm spindle disc and jaw blocks (7, 8, 9) - 3 sets Product Code: ZST-0472-15-00-00-0



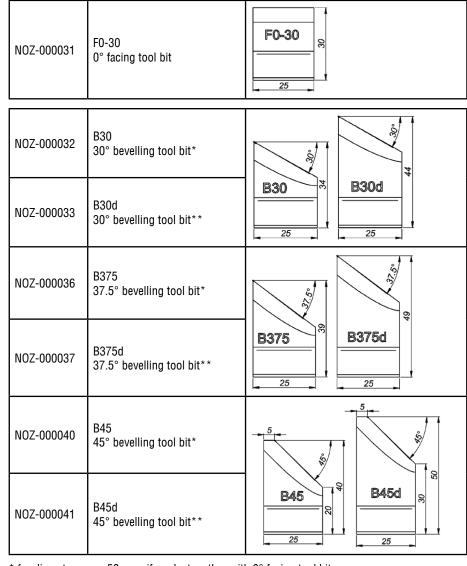




^{**} for diameters under 83mm, if works together with 0° facing tool bit

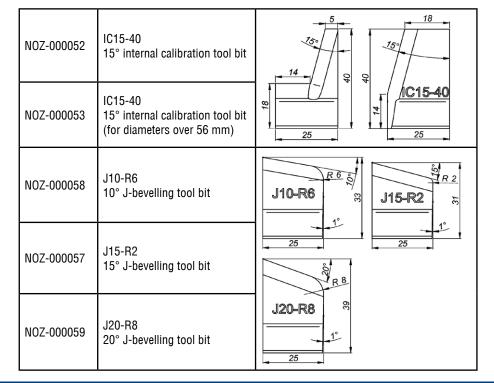



Wide range of tool bits for various applications.



Together with 0° facing tool bit either standard or long beveling tool bits are in use depending on pipe diameter



Stainless steel machining is available by means of special tool bits

Cutting fluid 0.5 kg (1.1 lbs) Product Code: 0LJ-000004





Air preparation set Product Code: ZST-000021

